



VIEW A



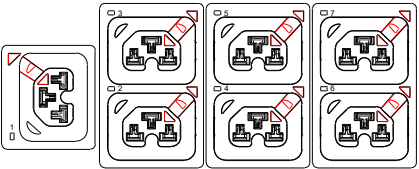


Locking C39 sockets

VIEW B




VIEW D




PDU Installation method-1

PDU Installation method-2


PDU Installation method

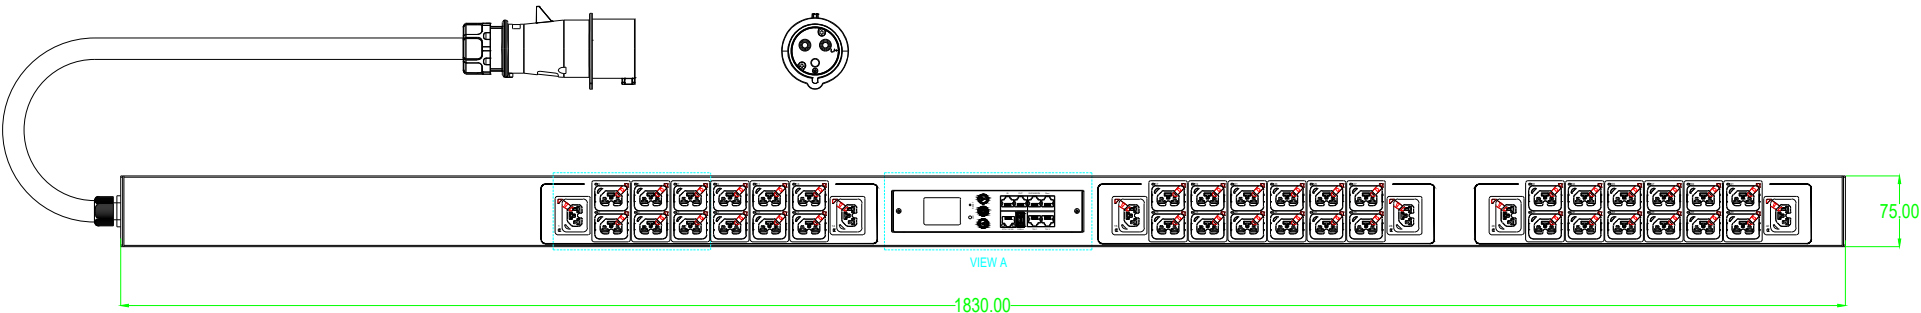

VIEW A



VIEW D



- Instructions
- 1.Please refer to the product manual for more information.
 - 2.Unless otherwise specified, all dimensions are in millimeters (mm).
 - 3.Cable length tolerance: 3000mm $\pm$ 100mm
 - 4.Product housing tolerance: Length $\pm$ 3mm; Width and height both $\pm$ 1mm

RoHS 2.0

Function	Output Monitored	Part Number	OM-004212A
Input	16A	Cable	3×2.5mm ² ×3M
Output	42×C39	Circuit Breaker	NA
Dimension	1830×75×68mm	Mounting Distance	1244mm