



VIEW A



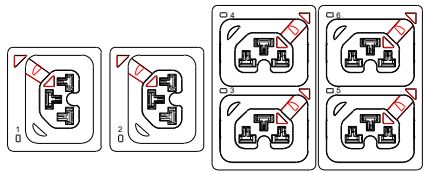


Locking C39 sockets

VIEW B




VIEW D




PDU Installation method-1

PDU Installation method-2

PDU Installation method

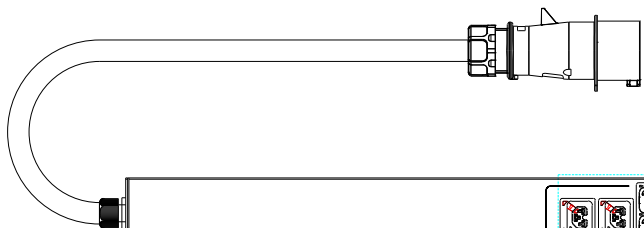

VIEW B




VIEW A




1830.00

75.00



VIEW D

68.00



293.00

1244.00

293.00

Instructions

- 1.Please refer to the product manual for more information.
- 2.Unless otherwise specified, all dimensions are in millimeters (mm).
- 3.Cable length tolerance: 3000mm $\pm$ 100mm
- 4.Product housing tolerance: Length $\pm$ 3mm; Width and height both $\pm$ 1mm

RoHS 2.0

Function	Switched&Monitored	Part Number	SI-003612A
Input	16A	Cable	3×2.5mm ² ×3M
Output	36×C39	Circuit Breaker	NA
Dimension	1830×75×68mm	Mounting Distance	1244mm