



VIEW A



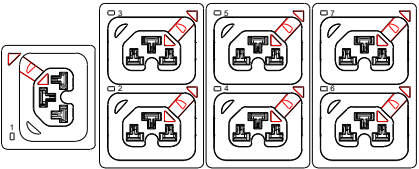


Locking C39 sockets

VIEW B




VIEW D




PDU Installation method-1

PDU Installation method-2


PDU Installation method

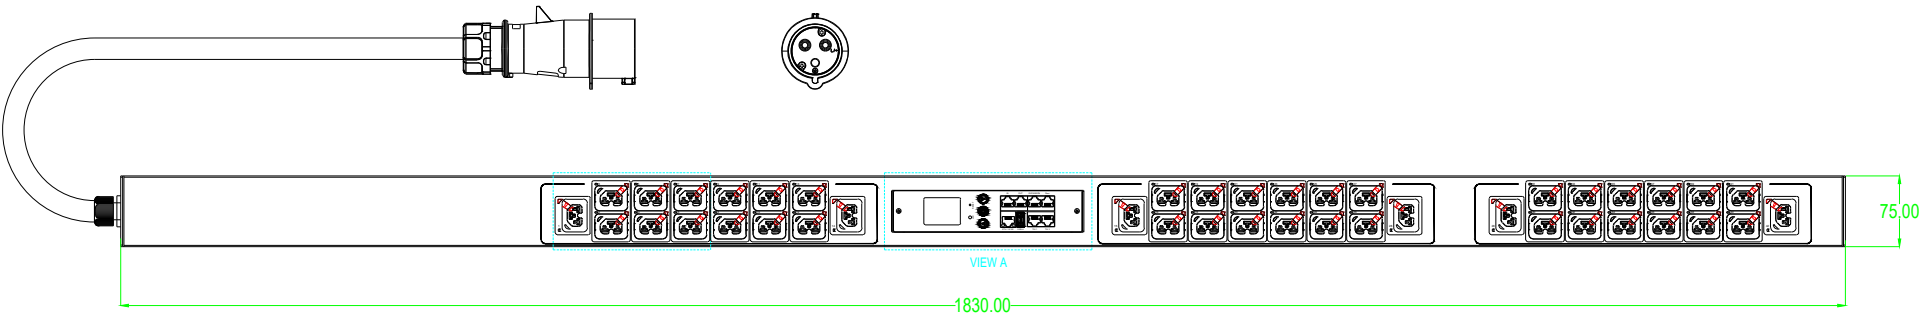

VIEW A



VIEW D



Instructions

- 1.Please refer to the product manual for more information.
- 2.Unless otherwise specified, all dimensions are in millimeters (mm).
- 3.Cable length tolerance: 3000mm  $\pm$  100mm
- 4.Product housing tolerance: Length  $\pm$  3mm; Width and height both  $\pm$  1mm

RoHS 2.0

| Function  | Switched&Output Monitored | Part Number       | SO-004212A               |
|-----------|---------------------------|-------------------|--------------------------|
| Input     | 16A                       | Cable             | 3×2.5mm <sup>2</sup> ×3M |
| Output    | 42×C39                    | Circuit Breaker   | NA                       |
| Dimension | 1830×75×68mm              | Mounting Distance | 1244mm                   |